



UPO11-1RT AX

online UPS


High performance double conversion

1kVA



For critical tasks and
corporate applications

Tower - Rack conversion design

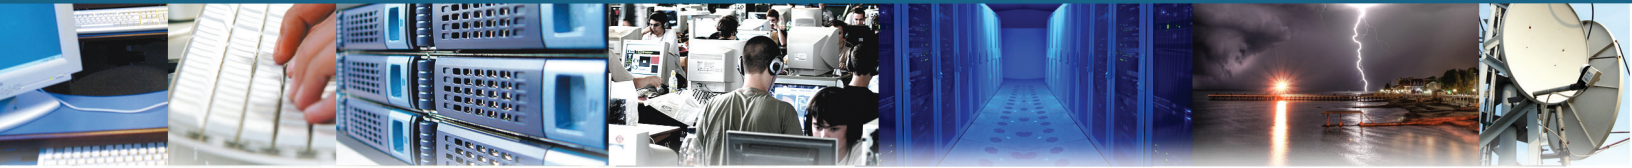

UPO11-1RT AX

UPS online

High performance double conversion,
for critical tasks and corporate applications

FEATURES


- Voltage range 55 - 150 Vac.
- Double conversion technology.
- Frequency regulation at output.
- Pure sine wave output.
- Offers greater availability for your equipment, by correcting low and high voltages without using batteries.
- Zero transfer time.
- Eliminates 99% of electrical problems.
- Cold start.
- Allows fast recovery after overload events.
- Ideal for protection of medical equipment, laboratory, mission critical servers or telecommunications critical servers or telecommunications.
- Total isolation of the load from the commercial grid.
- Maximizes battery performance, life and reliability through intelligent, precision charging.
- Protects the connected load against short or prolonged surges, lightning and other power irregularities.
- Converts input power to direct current (DC) and then to alternating current (AC).
- Protection against electromagnetic interference (EMI) or radio frequency interference (RFI).
- Frequency conversion capability.
- Programmable contacts.
- Extendable up to 10 battery banks.
- Power factor 1 output.
- UL certified.

LCD panel with 90° rotation





UPO11-1RT AX

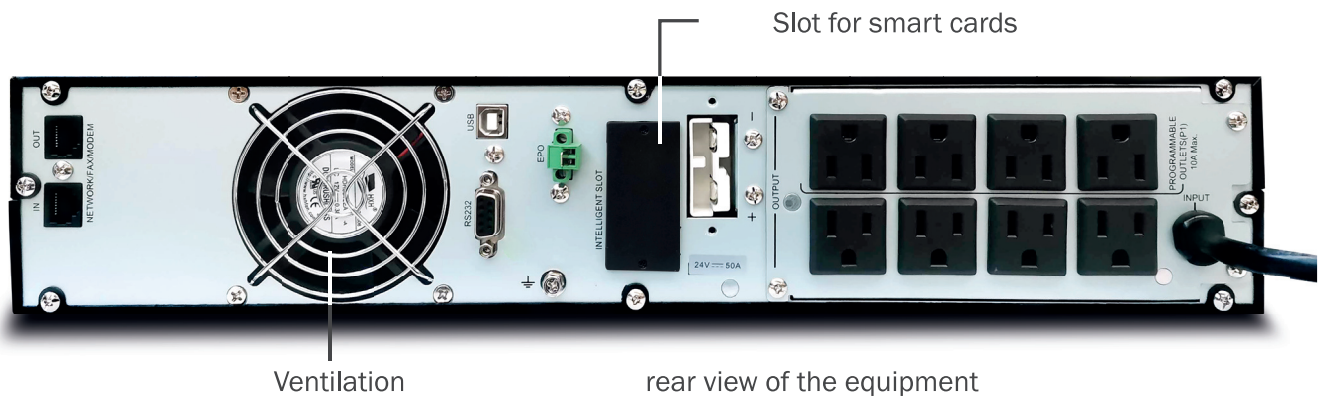


AC power cord
NEMA 5-15P




Emergency Power Off
(EPO)



Communication ports



Data line protection



Input for external
external batteries



8 NEMA 5-15R terminals,
of which 4 are programmable

Option card: SNMP



Tarjeta opcional: EMD
(Dispositivo de monitoreo ambiental)










Task-critical solutions for corporate applications

UPO11-1RT AX

Model		UPO11-1RT AX
Capacity		1000VA / 1000W
Input		120 VAC nominal voltage
Voltage range		55 VAC - 150 VAC \pm 3%
Frequency range		40Hz - 70Hz
Power factor		>/=0.99 @nominal voltage (full load)
Output		
Output voltage		100 / 110 / 115 / 120 VAC
Regulation volt. AC		+/-1%
Frequency range	Battery mode	50 Hz +/-0.1 Hz 60 Hz +/-0.1 Hz
Peak current		3:1
Overload		100% - 110: Alarm; 110/130: Battery mode: UPS shuts down in 30 seconds /normal mode = the UPS transfers to bypass mode when power is normal; >130%: battery mode= UPS shuts down immediately immediately / Normal mode= the UPS transfers to bypass mode when power is normal.
Harmonic distortion		</= 2% THD (non-linear loads)
Transfer time	AC mode to battery mode	Zero
Wave type (bat mode)		Pure sine wave
Efficiency		
AC mode		90%
Eco mode		98%
Batteries		
Battery type/quantity		12V/9Ah x 2
Recharge time		3 hours at 95% (typical)
Load current		1 - 8 Ah (max)
Charging voltage		27,4 Vcd +/-1%
Autonomy time		Full charge 5 minutes / Half charge 14 minutes
Battery banks		Extendable up to 10 battery banks
Physics		
Dimensions	(length x height x depth)	440 x 88 x 414mm
Net weight		11,6 Kg
Environmental		
Humidity		0-90% RH @ 0-45°C (non-condensing)
Noise level		Less than 50dBA @ 1 meter
Rack unit number		2U
Control		
Smart RS232 or USB		Supports Windows 2000 / 2003 / XP / Vista / 2008 / 7, 8,10, Linux and Mac
Optional SNMP		Control and command for SNMP and web browser (via internal SNMP or SNMPDB9)
Certifications		NOM, ISO9001, ISO14001, CIDET, TÜV, UL, CE

Product specifications are subject to change without notice

CDP COLOMBIA  colombia@cdpups.com
 CDP GUATEMALA  guatemala@cdpups.com
 CDP PERÚ  peru@cdpups.com
 CDP USA  usa@cdpups.com
 CDP ECUADOR  ecuador@cdpups.com

CDP CHINA  china@cdpups.com
 CDP COSTA RICA  costarica@cdpups.com
 CDP VENEZUELA  venezuela@cdpups.com
 CDP HONG KONG  hongkong@cdpups.com
 CDP MÉXICO  mexico@cdpups.com